


# SOLIDLINE

 Designed by Ledlenser



## TRUSTED LIGHTING SOLUTIONS



# SOLIDLINE TRUSTED LIGHTING SOLUTIONS

Solidline lights convince with many useful technologies and features. Be it a flashlight, headlamp, spotlight or work light: The broad range covers many areas of application. What is impressive here is not only just the performance but also the price.



## TECHNOLOGY

### FOCUS CONTROL SYSTEM

Seamless transition from low beam to high beam

### DUAL POWER SOURCE

Compatible with a rechargeable battery and standard batteries

### TEMPERATURE CONTROL

Protects the light from overheating

## CONTENTS

### COMPACT SPOTLIGHTS

NEW SAL1R	2
NEW SAL2R	2

### WORKLIGHTS

NEW SW2R	4
NEW SW3R	5

### HEADLAMPS

SH2	6
SH3	6
SH5	6
SH6R	6
NEW SH1	7

### CAMPING LIGHT

NEW CAMP2	8
-----------	---

### CLIP LIGHTS

SC2R   SC4R	9
-------------	---

### FLASHLIGHTS

ST1   ST2   ST4   ST4UV	10
ST5R   ST5   ST6TC   ST6   ST7	11
ST6R   ST7R   ST8R	12
SL6   SL7   SL10	13

### SILVER LINE

SL-PRO25   SL-PRO110   SL-PRO220   SL-PRO300	17
--	----






# COMPACT SPOTLIGHTS SAL1R AND SAL2R

**NEW**



Kelvin comparison: Different Color temperatures of the SAL2R

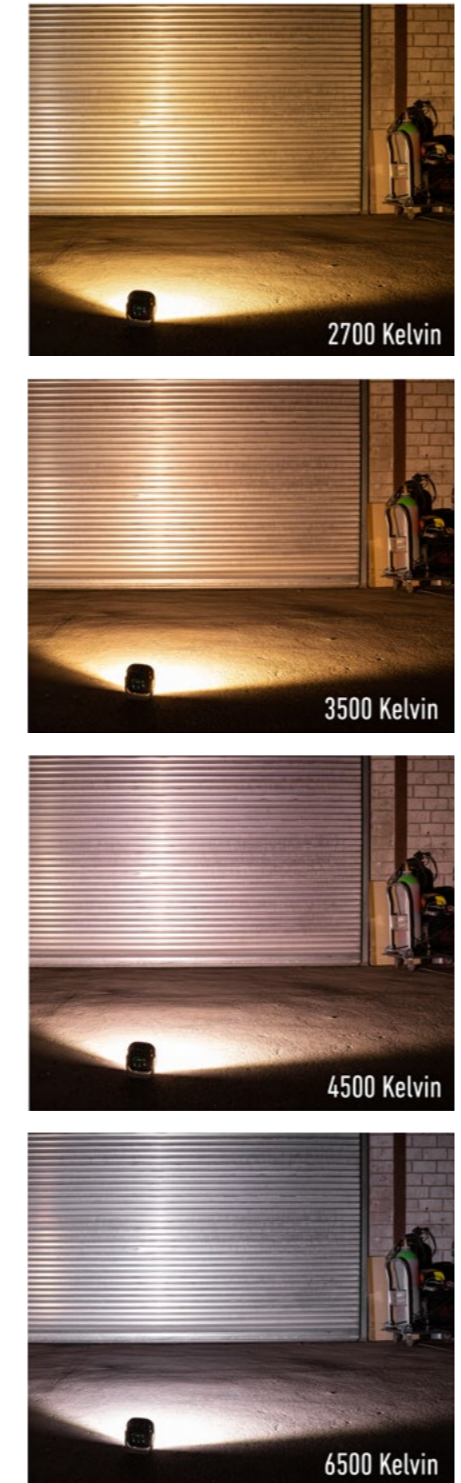

## SAL1R

The pocket-sized Solidline SAL1R provides bright floodlight or focused spotlight in various brightness levels at the touch of a button – perfect for spontaneous projects around the house, garden and workshop. The flexible lamp head can be swiveled by 225°, making it especially versatile. Three magnets and an integrated snap hook in the base provide additional flexibility for attachment. The integrated rechargeable battery with capacity and charge level indicator can be easily recharged via USB-C.


## SAL2R

The Solidline SAL2R is a compact LED area light with a powerful performance package for many fields of use around the house, garden and workshop. Whether by stand, tripod thread, carabiner or magnet – this work light can be positioned extremely flexibly. From any position, the SAL2R shines with its large function package and offers white light in four different color temperatures with four brightness levels each. Combining this with the available red light in constant or flashing mode it offers an impressive 18 different light functions. The robust powerhouse is fuelled by a powerful, integrated rechargeable battery that can also be used as a power bank.

	SAL1R	SAL2R
Item no.	502745	502742
<b>TECHNICAL DATA</b>		
W x D x H (mm)	50 x 123 x 34	98 x 45 x 111
Weight incl. batteries (g)	175	465
<b>POWER SUPPLY</b>		
Battery (installed)	1x Li-ion rechargeable battery 3,7V	1x Li-ion rechargeable battery 3,7V
<b>FURTHER SPECIFICATIONS</b>		
IP class	IP54	IP54
<b>LIGHT FUNCTIONS</b>		
Modes	Power, Mid Power, Low Power	Boost, Power, Mid Power, Low Power + Red light
<b>LIGHT VALUES MAX. –MIN.</b>		
	COB	Spot
Luminous flux (lm) <sup>1</sup>	450–15	230–40
Beam Distance (m) <sup>1</sup>	25–5	100–40
Run Time (h) <sup>1</sup>	100–5	25–5
<b>LIGHT SOURCE   LIGHT COLOR WHITE / RED</b>		
Amount LEDs	1 x COB LED, 1 x Power LED	1 x COB LED 4 x Red LED
<b>SWITCH</b>		
	Switch	Switch
<b>TECHNOLOGY</b>		
	-	Powerbank Function
Price (MSRP) in €	39,90	89,90
Scope of delivery	USB cable	USB cable



**RED LIGHT FUNCTION**

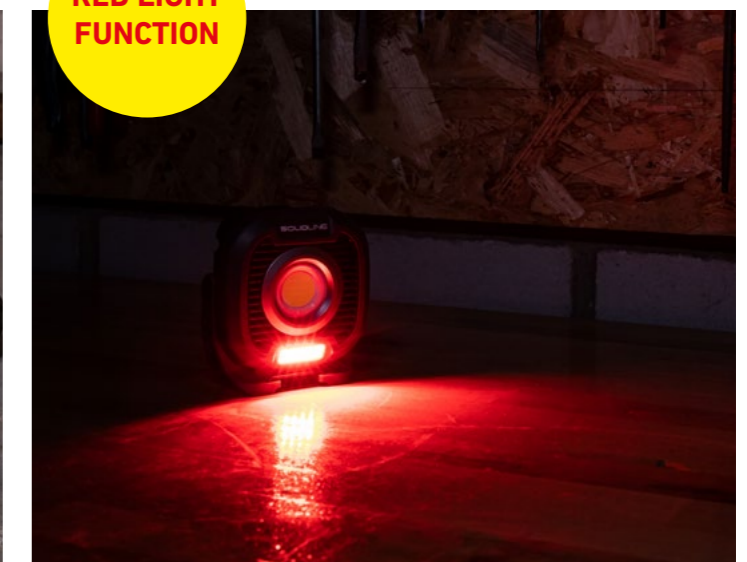

<sup>1</sup> Information on last page



# WORKLIGHTS SW2R AND SW3R

NEW



## SW2R

Item no. 502744

### TECHNICAL DATA

W x D x H (mm) 33 x 45 x 270  
Weight incl. batteries (g) 169

### POWER SUPPLY

Battery (installed) 1x Li-ion rechargeable battery 3,7V

### FURTHER SPECIFICATIONS

IP class IP54

### LIGHT FUNCTIONS

Modes Power, Mid Power, Low Power + Red light

LIGHT VALUES MAX. -MIN.	COB	Spot
Luminous flux (lm) <sup>1</sup>	550-25	85-50
Beam Distance (m) <sup>1</sup>	35-5	15-10
Run Time (h) <sup>1</sup>	40-2	20-10

### LIGHT SOURCE | LIGHT COLOR WHITE / RED

Amount LEDs 1 x COB LED WHITE/RED  
1 x Power LED

### SWITCH

Switch

### TECHNOLOGY


-

Price (MSRP) in € 39,90

Scope of delivery USB cable

## SW2R

With the Solidline SW2R light reaches even the last corner of your garage or workshop. The aluminum lamp head of this robust and versatile work light can be folded out as well as rotated by 180°, so that even narrow work areas are flexibly and reliably illuminated. The side COB flood LED alternatively provides white or red light in five different modes. The additional spot LED provides pinpoint white light in two dimming levels. For optimal grip, the light is equipped with a rubber handle. Furthermore, a base magnet and a fold-out metal hook offer additional mounting options. The integrated battery of the Solidline SW2R is easily rechargeable via micro-USB.

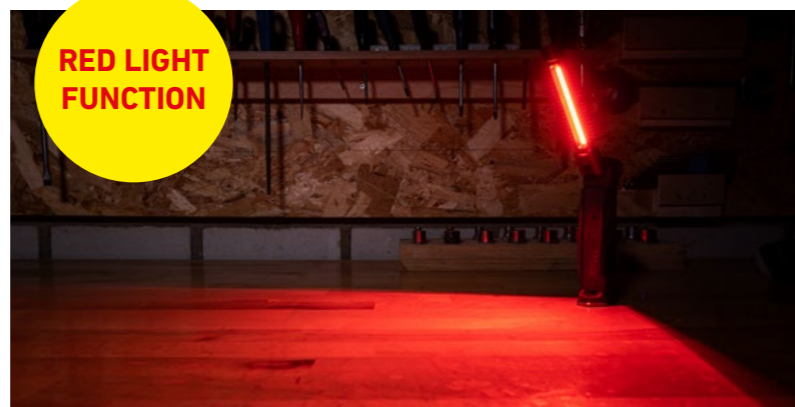

NEW



## SW3R

The Solidline SW3R provides powerful light for many work applications around the house, workshop, garage or garden. Its robust, protected lamp head made of aluminum can be swiveled by 120° and can therefore be aligned particularly flexibly. In combination with the various brightness levels, the SW3R thus always shines where it is needed. Its rubber handle, the integrated carabiner and a base magnet ensure flexible and safe handling in every situation. Thanks to the professional charging cradle included in the package, the powerful battery can be fast charged easily.

## SW3R

Item no. 502758

### TECHNICAL DATA

W x D x H (mm) 54 x 76 x 168  
Weight incl. batteries (g) 252

### POWER SUPPLY

Battery (installed) 1x Li-ion rechargeable battery 3,7V

### FURTHER SPECIFICATIONS

IP class IP54

### LIGHT FUNCTIONS

Modes Power, Mid Power, Low Power

LIGHT VALUES MAX. -MIN.	Spot	Flood
Luminous flux (lm) <sup>1</sup>	700-15	400-75
Beam Distance (m) <sup>1</sup>	140-15	30-5
Run Time (h) <sup>1</sup>	160-4	30-6

### LIGHT SOURCE | LIGHT COLOR WHITE

Amount LEDs 1 x Xtreme LED,  
1 x High Power LED

### SWITCH

Switch

### TECHNOLOGY

Magnetic Charge System

Price (MSRP) in € 59,90

Scope of delivery USB cable





## GESTURE CONTROL

The innovative gesture control is an impressive feature of the Solidline SH1, SH3, SH5 and the clip lamp SC4R. Bring your hand briefly past the sensor - and the lamp switches itself on and off.



# SOLIDLINE HEADLAMPS



### SH2

Item no. 502203



### SH3

Item no. 502204



### SH5

Item no. 502205



### SH6R

Item no. 502206

#### TECHNICAL DATA

Head diameter (mm)	27	27	27	36
Weight incl. batteries (g)	85	85	86	163

#### POWER SUPPLY

Usable batteries	<ul style="list-style-type: none"> <li>3x Alkaline (AAA) 1,5V</li> <li>3x NiMH (AAA) 1,2V</li> <li>Solidline Li-ion rechargeable battery pack 850 mAh (Led-lenser item 502413)</li> </ul>	<ul style="list-style-type: none"> <li>3x Alkaline (AAA) 1,5V</li> <li>3x NiMH (AAA) 1,2V</li> <li>Solidline Li-ion rechargeable battery pack 850 mAh (Led-lenser item 502413)</li> </ul>	<ul style="list-style-type: none"> <li>3x Alkaline (AAA) 1,5V</li> <li>3x NiMH (AAA) 1,2V</li> <li>Solidline Li-ion rechargeable battery pack 850 mAh (Led-lenser item 502413)</li> </ul>	<ul style="list-style-type: none"> <li>1x 18650 rechargeable battery (Li-ion) 3,7V</li> </ul>
------------------	---	---	---	---

#### FURTHER SPECIFICATIONS

IP class	IP54	IP54	IP54	IP54
----------	------	------	------	------

#### LIGHT FUNCTIONS

Modes	Boost, Power, Low Power   + Red light	Boost, Power, Mid Power, Low Power	Boost, Power, Mid Power, Low Power   + Red light	Boost, Power, Low Power
-------	---------------------------------------	------------------------------------	--	-------------------------

LIGHT VALUES MAX. -MIN.	Alkaline		Li-ion		Alkaline		Li-ion	
	Alkaline	Li-ion	Alkaline	Li-ion	Alkaline	Li-ion	Alkaline	Li-ion
Luminous flux (lm) <sup>1</sup>	200-20	300-20	300-20	350-20	350-20	500-20	600-30	
Beam Distance (m) <sup>1</sup>	155-20	185-20	180-20	190-20	190-20	225-20	300-50	
Run Time (h) <sup>1</sup>	25-7	20-3	25-6	20-2	25-5	20-1	50-5	

#### LIGHT SOURCE | LIGHT COLOR WHITE

Amount LEDs	1 x High Power LED	1 x High Power LED	1 x High Power LED	1 x Xtreme LED
-------------	--------------------	--------------------	--------------------	----------------

#### SWITCH

	Front switch	Front switch	Front switch	Front switch
--	--------------	--------------	--------------	--------------

#### TECHNOLOGY

	Focus Control System, Dual Power Source,	Focus Control System, Dual Power Source, Gesture control	Focus Control System, Dual Power Source, Gesture control	Focus Control System, Temperature Control System
--	--	--	--	--

Price (MSRP) in €	25,90	29,90	34,90	59,90
-------------------	-------	-------	-------	-------

Scope of delivery	-	-	-	1 Rechargeable battery-set, USB cable
-------------------	---	---	---	---------------------------------------

## SH1

The robust Solidline SH1 is a practical, easy-to-use everyday headlamp with two brightness levels. With its innovative gesture control, it offers an impressive feature for a light in its price range. Just move your hand briefly past the sensor - and the light switches itself on and off. Together with the swiveling lamp head and the comfortable headband, the SH1 is ideal for many uses around the house and garden. The SH1 draws its power from two AAA batteries.



NEW

### SH1

Item no. 502743



Item no.

#### TECHNICAL DATA

Head diameter (mm)	58
Weight incl. batteries (g)	65

#### POWER SUPPLY

Usable batteries	<ul style="list-style-type: none"> <li>2 x Alkaline (AAA) 1,5V</li> <li>2 x AAA NiMH 1,2V</li> </ul>
------------------	--

#### FURTHER SPECIFICATIONS

IP class	IP55
----------	------

#### LIGHT FUNCTIONS

Modes	Power, Low Power
-------	------------------

#### LIGHT VALUES MAX. -MIN.

Luminous flux (lm) <sup>1</sup>	110-15
Beam Distance (m) <sup>1</sup>	15-6
Run Time (h) <sup>1</sup>	10-2

#### LIGHT SOURCE | LIGHT COLOR WHITE

Amount LEDs	1 x COB LED
-------------	-------------

#### SWITCH

Switch

#### TECHNOLOGY

Gesture control

Price (MSRP) in €	19,90
-------------------	-------

Scope of delivery	1 set of batteries
-------------------	--------------------







# HANDS FREE FOR MOBILE ACTIVITIES

## Camp2


The Solidline Camp2 is a small, practical multifunctional light at an affordable price. Whether camping, on the nightstand or as a backup light for all cases: Thanks to white light and red light LEDs, the Camp2 offers cozy illumination in a small format without blinding. Clever attachment options such as the integrated magnet and the elastic cord make it a versatile companion. The Camp2 draws its energy from three AAA batteries.

**NEW**



Item no.	502741
<b>TECHNICAL DATA</b>	
Lenght, Head, Tube (mm):	61 x 50 x 50
Weight incl. batteries (g)	92
<b>POWER SUPPLY</b>	
Usable batteries	• 3 x Alkaline (AAA) 1,5V • 3 x AAA NiMH 1,2V
<b>FURTHER SPECIFICATIONS</b>	
IP class	IP54
<b>LIGHT FUNCTIONS</b>	
Modes	Power, Low Power + Red light
<b>LIGHT VALUES MAX. -MIN.</b>	
Luminous flux (lm) <sup>1</sup>	140-10
Beam Distance (m) <sup>1</sup>	10-1
Run Time (h) <sup>1</sup>	120-7
<b>LIGHT SOURCE   LIGHT COLOR WHITE</b>	
Amount LEDs	1 x Power LED
<b>SWITCH</b>	
	Switch
<b>TECHNOLOGY</b>	
	-
Price (MSRP) in €	19,90
Scope of delivery	1 set of batteries

**RED LIGHT  
FUNCTION**

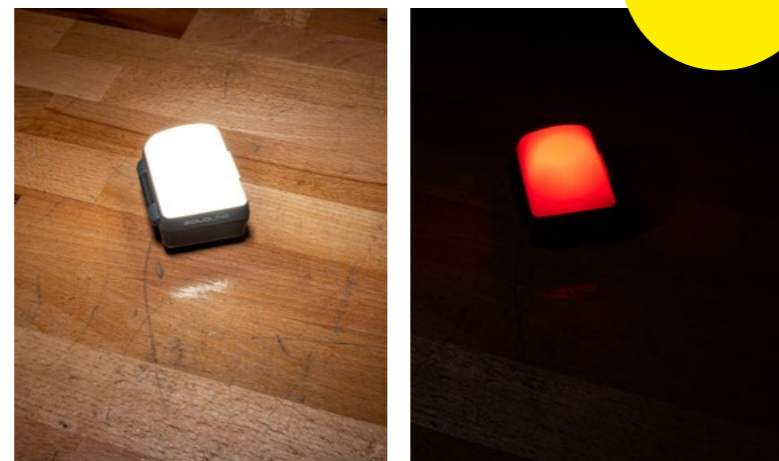

**ABS-  
PLASTIC**



	SC2R	SC4R
Item no.	502227	502228
<b>TECHNICAL DATA</b>		
W x D x H (mm)	68 x 35 x 25	68 x 35 x 25
Weight incl. batteries (g)	35	35
<b>POWER SUPPLY</b>		
Usable batteries	1 x Li-ion rechargeable battery 3,7V	1 x Li-ion rechargeable battery 3,7V
<b>FURTHER SPECIFICATIONS</b>		
IP class	IP44	IP44
<b>LIGHT FUNCTIONS</b>		
Modes	Blink, Power, Mid Power, Low Power   + Red light	Blink, Power, Mid Power, Low Power   + Red light
<b>LIGHT VALUES MAX. -MIN.</b>		
Luminous flux (lm) <sup>1</sup>	100-5	200-5
Beam Distance (m) <sup>1</sup>	-	-
Run Time (h) <sup>1</sup>	75-5	75-2,5
<b>LIGHT SOURCE   LIGHT COLOR WHITE</b>		
Amount LEDs	1 x COB LED 1 x COB LED Red	1 x COB LED 1 x COB LED Red
<b>SWITCH</b>		
	Switch	Switch
<b>TECHNOLOGY</b>		
	-	Gesture control
Price (MSRP) in €	16,90	19,90
Scope of delivery	USB cable	USB cable

The compact clip lamps SC2R and SC4R can be attached in many ways and provide versatile light in many everyday situations.





# SOLIDLINE FLASHLIGHTS

Robust housing made of aircraft aluminum with a non-slip surface structure.

ALUMINIUM



With additional  
UV LED, 365 nm  
for continuous light  
and flashing

With powerful  
Li-ion rechargeable  
battery for up to  
380 lm<sup>1</sup>  
(in Power Mode)



	ST1	ST2	ST4	ST4UV
Item no.	502207	502208	502209	502417
<b>TECHNICAL DATA</b>				
Length (mm)	61	98	141	141
Head diameter (mm)	15	16	16	16
Weight incl. batteries (g)	21	39	60	60
<b>POWER SUPPLY</b>				
Usable batteries	1x Alkaline (AAA) 1,5V	• 1x Alkaline (AAA) 1,5V • 1x NiMH (AAA) 1,2V	• 2x Alkaline (AAA) 1,5V • 2x NiMH (AAA) 1,2V	• 2x Alkaline (AAA) 1,5V • 2x NiMH (AAA) 1,2V
<b>FURTHER SPECIFICATIONS</b>				
IP class	IP54	IP54	IP54	IP54
<b>LIGHT FUNCTIONS</b>				
Modes	Power	Boost, Power, Low Power	Boost, Power, Low Power	Boost, Power, Low Power, UV, UV Blink
<b>LIGHT VALUES MAX. -MIN. POWER MODUS MAX.</b>				
Luminous flux (lm) <sup>1</sup>	100	120-10	180-10	180-10
Beam Distance (m) <sup>1</sup>	35	55-15	70-15	70-15
Run Time (h) <sup>1</sup>	1	20-3	30-4	30-4
<b>LIGHT SOURCE   LIGHT COLOR WHITE</b>				
Amount LEDs	1 x Power LED	1 x Power LED	1 x High Power LED	1 x High Power LED
<b>SWITCH</b>				
	Rotary switch	Endcap switch	Endcap Switch	Endcap Switch
<b>TECHNOLOGY</b>				
	-	-	-	-
Price (MSRP) in €	12,90	18,90	24,90	29,90
Scope of delivery	1 set of batteries, Key ring	Pocket clip	Pocket clip	Pocket clip

	ST5R	ST5	ST6TC	ST6	ST7
Item no.	502551	502210	502277	502211	502213
<b>TECHNICAL DATA</b>					
Length (mm)	117	104	101	115	119
Head diameter (mm)	26	28	27	29	33
Weight incl. batteries (g)	88	90	98	144	156
<b>POWER SUPPLY</b>					
Usable batteries	1x 14500 Li-ion rechargeable battery 3,7V	• 1x Alkaline (AA) 1,5V • 1x NiMH (AA) 1,2V • 1x 14500 Li-ion Rechargeable battery oder Ledlenser item 500986 und 500985	• 3x Alkaline (AAA) 1,5V • 3x NiMH (AAA) 1,2V	• 3x Alkaline (AAA) 1,5V • 3x NiMH (AAA) 1,2V • Solidline Li-ion rechargeable battery pack 1450 mAh (Item 502415)	• 3x Alkaline (AAA) 1,5V • 3x NiMH (AAA) 1,2V • Solidline Li-ion rechargeable battery pack 1450 mAh (Item 502415)
<b>FURTHER SPECIFICATIONS</b>					
IP class	IP54	IP54	IP54	IP54	IP54
<b>LIGHT FUNCTIONS</b>					
Modes	Power, Low Power, Strobe	Boost, Power, Low Power	Power, Mid Power, Low Power, White/Red/Green	Boost, Power, Low Power	Boost, Power, Low Power
<b>LICHTWERTE MAX.-MIN.</b>					
Luminous flux (lm) <sup>1</sup>	380-20	Alkaline 150-10 Li-ion 300-10	Wei 50-5 Rot 10-2 Grn 10-2	Alkaline 320-30 Li-ion 400-30	Alkaline 360-30 Li-ion 400-30
Beam Distance (m) <sup>1</sup>	230-50	75-20	35-10	140-20	180-25
Run Time (h) <sup>1</sup>	15-3	25-2,5	70-10	25-4	30-4
<b>LIGHT SOURCE   LIGHT COLOR WHITE</b>					
Amount LEDs	1 x High Power LED	1 x Power LED	6 x Low Power LED	1 x High Power LED	1 x High Power LED
<b>SWITCH</b>					
	Endcap Switch	Endcap Switch	3 x Front switch	Endcap Switch	
<b>TECHNOLOGY</b>					
	Focus Control System, Floating Charge System	Focus Control System, Dual Power Source	-	Focus Control System, Dual Power Source	Focus Control System, Dual Power Source
Price (MSRP) in €	49,90	26,90	24,90	29,90	34,90
Scope of delivery	1 Rechargeable Battery, Floating Charge System, Wall Mount, Pocket clip	Pocket clip	1 set of batteries	Pocket clip	Pocket clip

# SOLIDLINE FLASHLIGHTS

HIGH QUALITY  
LOW PRICE



Aircraft aluminum rechargeable models

## ALUMINIUM



	ST6R	ST7R	ST8R
Item no.	502212	502214	502215
<b>TECHNICAL DATA</b>			
Length (mm)	126	131	153
Head diameter (mm)	26	33	38
Weight incl. batteries (g)	135	160	221
<b>POWER SUPPLY</b>			
Usable batteries	<ul style="list-style-type: none"> <li>1x 18650 Li-ion rechargeable battery 3,6V rechargeable via Micro-USB (Item 502595)</li> <li>2x CR123 3V</li> <li>1x 18650 Li-ion rechargeable battery</li> </ul>	<ul style="list-style-type: none"> <li>1x 18650 Li-ion rechargeable battery 3,6V rechargeable via Micro-USB (Item 502595)</li> <li>2x CR123 3V</li> <li>1x 18650 Li-ion rechargeable battery</li> </ul>	1x 18650 Li-ion rechargeable battery 3,7V
<b>FURTHER SPECIFICATIONS</b>			
IP class	IP54	IP54	IP54
<b>LIGHT FUNCTIONS</b>			
Modes	Boost, Power, Low Power	Boost, Power, Low Power	Boost, Power, Low Power
<b>LIGHT VALUES MAX. -MIN.</b>			
Luminous flux (lm) <sup>1</sup>	900-30	1000-30	600-10
Beam Distance (m) <sup>1</sup>	240-50	300-60	300-30
Run Time (h) <sup>1</sup>	40-5	40-5	60-8
<b>LIGHT SOURCE   LIGHT COLOR WHITE</b>			
Amount LEDs	1 x Xtreme LED	1 x Xtreme LED	1 x Xtreme LED
<b>SWITCH</b>			
	Endcap switch	Endcap switch	Endcap switch
<b>TECHNOLOGY</b>			
	Focus Control System, Temperature Control	Focus Control System, Temperature Control	Focus Control System, Floating Charge System, Smart Light Technology
Price (MSRP) in €	49,90	59,90	69,90
Scope of delivery	1 Rechargeable battery, Pocket clip, USB cable	1 Rechargeable battery, Pocket clip, USB cable	1 Rechargeable battery, Pocket clip, USB cable, Floating Charge System

Lamp series made of high-quality lightweight plastic.  
Reduced heat conduction due to harmless ABS plastic.

## ABS-KUNSTSTOFF



	SL6	SL7	SL10
Item no.	502232	502233	502234
<b>TECHNICAL DATA</b>			
Length (mm)	131	145	200
Head diameter (mm)	32	41	50
Weight incl. batteries (g)	130	180	311
<b>POWER SUPPLY</b>			
Usable batteries	<ul style="list-style-type: none"> <li>3x Alkaline (AAA) 1,5V</li> <li>3x NiMH (AAA) 1,2V</li> <li>Solidline Li-ion rechargeable battery pack 1450 mAh (Item 502415)</li> </ul>	<ul style="list-style-type: none"> <li>4x Alkaline (AAA) 1,5V</li> <li>4x NiMH (AAA) 1,2V</li> </ul>	<ul style="list-style-type: none"> <li>4x Alkaline (AA) 1,5V</li> <li>4x NiMH (AA) 1,2V</li> </ul>
<b>FURTHER SPECIFICATIONS</b>			
IP class	IP54	IP54	IP54
<b>LIGHT FUNCTIONS</b>			
Modes	Boost, Power, Low Power	Boost, Power, Low Power	Boost, Power, Low Power
<b>LIGHT VALUES MAX. -MIN.</b>			
Luminous flux (lm) <sup>1</sup>	Alkaline 320-30 Li-ion 400-30	400-30	750-30
Beam Distance (m) <sup>1</sup>	140-20 150-20	200-45	250-45
Run Time (h) <sup>1</sup>	25-9 25-5	30-3	35-5
<b>LIGHT SOURCE   LIGHT COLOR WHITE</b>			
Amount LEDs	1x High Power LED	1x High Power LED	1x High Power LED
<b>SWITCH</b>			
	Endcap switch	Endcap switch	Endcap switch
<b>TECHNOLOGY</b>			
	Focusable via rotary focus, Dual Power Source	Focusable via rotary focus	Focusable via rotary focus
Price (MSRP) in €	25,90	34,90	39,90
Scope of delivery	Pocket clip	Pocket clip	Pocket clip



**THE TRUSTED SILVER LINE**  
**HIGH QUALITY, LOW PRICE**





# THE SOLIDLINE SILVER LINE

## SL-PR025



- The most economical light in the Solidline weighing only 33 g
- With convenient keyring to attach right to your set of keys
- One-hand rotary switch for easy and intuitive operation
- The familiar quality provides a beam distance of up to 60 meters<sup>1</sup>

## SL-PR0110



- Compact price-performance champion weighing only 67 g
- 100 lumen<sup>1</sup> lighting power with an impressive run time
- Maximum operation and solid workmanship
- Handy size and light weight always ready to use

## SL-PR0220



- All-rounder for emergencies and dangerous situations
- Provides up to 30 hours<sup>1</sup> of light and a beam distance of up to 180 meters<sup>1</sup>
- Handy size and light weight always ready to use
- Works with the standard AAA batteries

## SL-PR0300



- Multiple lighting settings from “Low Power” to “Boost” for flexibility
- Reliable tool with an incredible 50 hours<sup>1</sup> of run time
- Aircraft-grade aluminum
- High-end LEDs for a beam distance of up to 250 meters<sup>1</sup>

## The Solidline Silver Line

Compact basic equipment in high quality. The robust aluminum casing protects against scratches and splashing water.



	SL-PR025	SL-PR0110	SL-PR0220	SL-PR0300
Item no.	501065	501066	501067	501068
<b>TECHNICAL DATA</b>				
Length (mm)	81	107	115	184
Head diameter (mm)	19	24	34	44
Weight incl. batteries (g)	33	67	128	336
<b>POWER SUPPLY</b>				
Usable batteries	1x Alkaline (AAA) 1.5V	1x Mignon (AA) 1.5V	3x Alkaline (AAA) 1.5V	4x Mignon (AA) 1.5V
<b>FURTHER SPECIFICATIONS</b>				
IP class	IPX4	IPX4	IPX4	IPX4
<b>LIGHT FUNCTIONS</b>				
Modes	Power	Power	Power	Boost, Power, Low Power
<b>LIGHT VALUES MAX. -MIN. POWER MODUS MAX. POWER MODUS MAX. POWER MODUS MAX.</b>				
Luminous flux (lm) <sup>1</sup>	25	100	220	300-40
Beam Distance (m) <sup>1</sup>	60	100	180	250-90
Run Time (h) <sup>1</sup>	8	7	30	50-5
<b>LIGHT SOURCE   LIGHT COLOR WHITE</b>				
Amount LEDs	1 x Power LED	1 x Power LED	1 x Power LED	1 x High Power LED
<b>SWITCH</b>				
	Rotary Switch	Endcap switch	Endcap switch	Endcap switch
<b>TECHNOLOGY</b>				
	-	-	-	-
Price (MSRP) in €	7,99	15,90	19,90	26,90
Scope of delivery	1 set of batteries, Key ring	1 set of batteries, Hand strap	1 set of batteries, Hand strap	1 set of batteries, Hand strap



Item no. 502402



V3.0

**Ledlenser GmbH & Co. KG**

Kronenstraße 5-7, 42699 Germany, Deutschland

USt-IdNr.: DE815242425, Amtsgericht Wuppertal, HRA 23078

Personally liable partner:

Ledlenser Beteiligungs GmbH

Headquarters: Solingen, Deutschland

Amtsgericht Wuppertal, HRB 24774

Executive Director: Michael Reuter, Kai Milewski

**solidline.com**

<sup>1</sup> Measured values according to ANSI FL1 in the specified light color and setting. If no light color is expressly named, the measured values refer to white light. In the case of information in the form of a „Max.-Min.“ Range, the range from the lightest setting (first value) to the lowest setting (second value) is used concerning luminous flux (lumen / lm) and beam distance (meter / m) About the values for run time (hours / h), the range from the lowest setting (first value) to the lightest setting (second value) is noted. A boost function (if applicable) can be used several times, but only for short periods of time. If the light has different energy modes, measurement is based on "energy saving mode."